

MONTIFLEX

FLEXIBLE METAL HOSE FOR WATER

Our product MONTIFLEX is used for simple and safe installation of liquid distribution. By the bend of pipes is easy to replace the elbows. Pipes are delivered in yardage and they are adjusted on required length directly at the place of installation with the tools delivered in case.

Basic dimensions and technical parameters of yardage:

DN	Inner diameter mm	Outside diameter mm	Tolerance mm	Minimal bending radius mm	Nut	Weight kg/m	Allowed pressure at 20°C bar	Manufacturing length m
12	12,6	16,7	± 0,3	20	G ½"	0,085	21	10-100
16	16,5	21,4	± 0,3	25	G ¾"	0,136	16	
20	20,5	26,7	± 0,3	30	G 1"	0,192	10	
25	25,4	31,7	± 0,3	35	G 1.1/4"	0,273	10	

Material of yardage: stainless steel AISI 316L

Material of nut: brass



Delivery options:

Can be supplied as individual parts or the complete mounting case, which contains: cutter for pipes, hand hammer for pressing of yardage, replacable split jowls, 10 pcs. of brass nuts, sealings and segment rings for hoses DN 12, 16 and DN 20.


USING :

WATER – system is suitable for pressure distribution of service and drinking water. Suitable for connection of boilers, furnaces, radiators, water armatures for sanitary equipment, dishwashers and everywhere, where the assembly by standard way is complicated.

For the correct way of preparing the hoses, please follow the instructions in the MONTIFLEX installation manual.



Company KOHAFLEX is a holder of Quality certificate ISO 9001

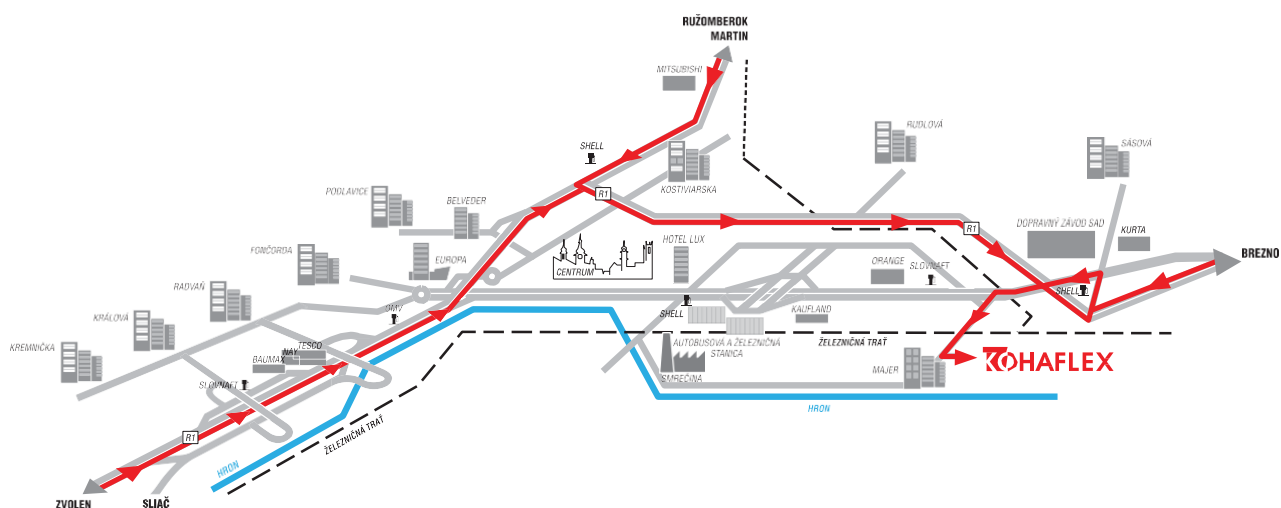

KOHAFLEX spol. s r. o.
P.O.BOX 78 - Pošta 5, Majerská cesta 57, 974 05 Banská Bystrica
tel.: 00421 48 414 89 57, 00421 48 414 89 58
e-mail: kohaflex@kohaflex.sk
www.kohaflex.sk

KOHAFLEX CZ spol. s r. o.
Kotkova 6, 703 00 Ostrava - Vítkovice
tel.: 00420 602 726 584, 00420 602 117 790
e-mail: kohaflex@kohaflex.cz
www.kohaflex.sk